




## Instructions of Apex OEM-size Epson compatible chip installation.

### I Choose suitable chip holder

a) Holders with two holes on the top left and right, are adaptable for cartridge structure of printers released before June 2008.



b) Holders with one hole each on the top and bottom, are suitable for cartridge structure of printers released since June 2008.

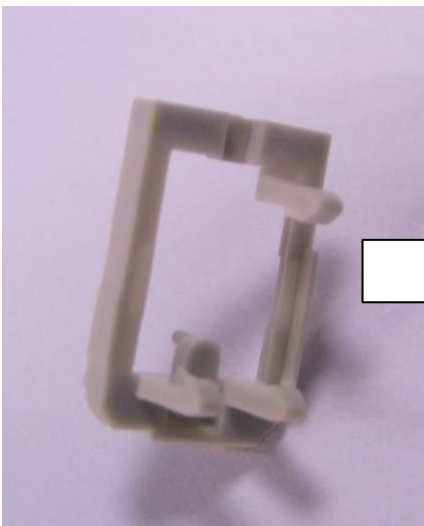


## II Instructions for installation

Below is a picture of the original cartridge.





Follow below concrete operation steps:

a) Remove the original chip bracket from the cartridge, then you can see two copper sheets.

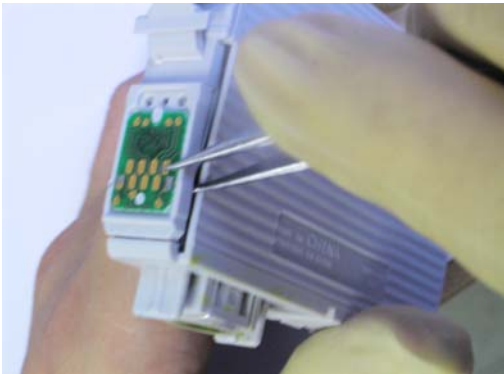

b) Snip off the two copper sheets to cut off any contact of the copper and the backside of Apex chips to eliminate influence on electric polarity;

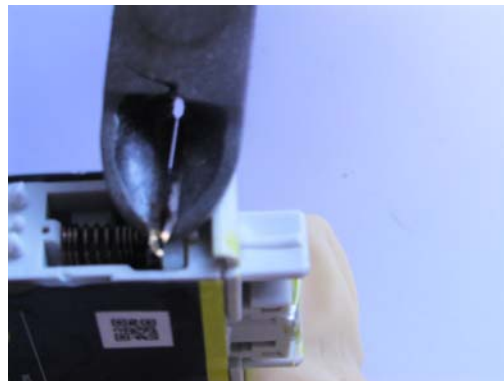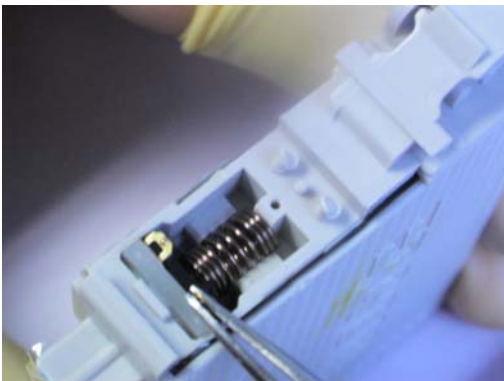

Below shows the cartridge without copper sheets:



c) Cut off the protuberant plastic part above the coil spring to flat level, to avoid damage caused by it to the components on chip backside during installation. Skip this step if for cartridges Epson released later like 73N series which do not have such coil spring.



d) Fit Apex holder on the cartridge:



Below shows the cartridge with Apex holder on:



e) Fit Apex chip in the holder, and please do weld the two outshoot points on the holder to fix the chip location to protect it from losing during printing.

